

UNIQUE FEATURES

Configurable to your own needs



Spiro[®] Speed Carrier (SSC)

Increases production capacity up to 30%



Standard Run-off Table

duct length up to 3m, including automatic discharge



Horizontal Decoiler DCH-3000

3 coil capacity at once



Vertical Decoiler DCV-1000

Standard decoiler with max. 1000 kg loading capacity



Cassette System

Fast set-up and ergonomic



Form Roll Unit (FRU)

Standard unit with highest steel quality rollers



Slitter Model H

Superior cutting / minimized maintenance / easy set-up



Quick-lock System

Optional fast change of forming heads



State-of-the-art User Interface

User-friendly display featuring interface to network and internet, diagnosis tool and multilingual function



Automatic Corrugation Unit

Produce ducts with smooth inside surface at the ends but reinforced with corrugation



Standard Corrugation Unit

Reinforce your ducts with dimensions >250mm




Post-tensioning Application

Special duct application for construction industry



Drive Configuration

Different configurations to empower the production capacities

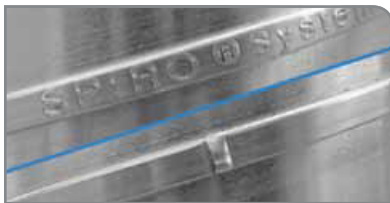

Individual Engraving / Fixed Lockseam

For marketing purposes / For assured duct quality



Spiro[®] Connect

Digitalize your production planning

Collapsing pressure for duct SR

Diameter Ø		80	100	125	160	200	250	315	400	500	630	800	1000	1250
Sheet metal thickness standard t		0.45	0.45	0.45	0.5	0.5	0.5	0.6	0.6	0.7	0.7	0.8	0.9	0.9
Negative Pressure [kPa]	Without stiffening corrugations					With stiffening corrugations								
	0													
	10													
	20													
	30													
	40													
	50													
	60													
	*Collapse not achieved													
Diameter Ø		80	100	125	160	200	250	315	400	500	630	800	1000	1250